


RETROGRADE FEMUR NAIL SYSTEM (MULTI DIRECTIONAL)

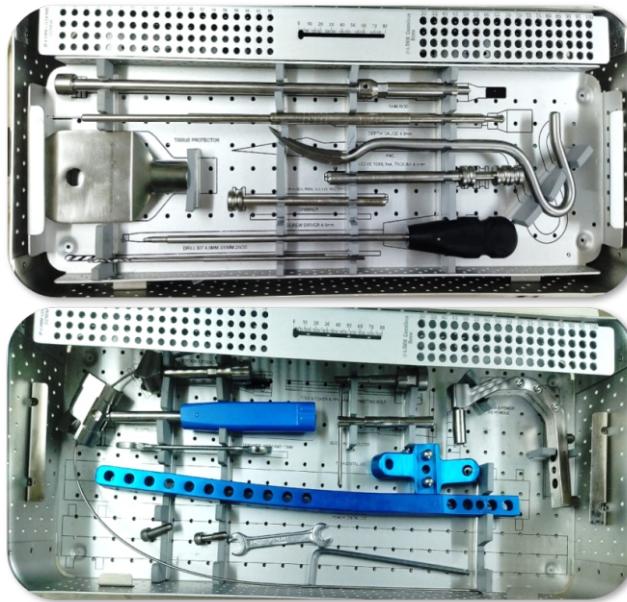

RETROGRADE FEMUR NAIL (MULTI DIRECTIONAL) IMPLANT SYSTEM

DISTAL FEMORAL NAIL (DFN) (RETROGRADE)

DISTAL FEMORAL NAIL (DFN) (RETROGRADE) 9.0MM

DISTAL FEMORAL NAIL (DFN) (RETROGRADE) 10.0MM

DISTAL FEMORAL NAIL (DFN) (RETROGRADE) 11.0MM

DISTAL FEMORAL NAIL (DFN) (RETROGRADE) 12.0MM

CANCELLOUS SCREWS Ø 6.5MM (F.TH)

LOCKING BOLT (SELF TAPPING) Ø 4.9 MM



RETROGRADE FEMUR NAIL SYSTEM (MULTI DIRECTIONAL)



RETROGRADE FEMUR NAIL SYSTEM (MULTI DIRECTIONAL) INSTRUMENT SET	
CAT. NO.	NAME OF INSTRUMENTS
903.126	EXTRACTOR RAM ROD
1706.023	SCREW DRIVER (HEXAGONAL) Ø 4.5MM FOR I. L
426.140	DRILL BIT Ø 4.0MM X 225 MM - NON-COUPLING
426.225	DRILL BIT Ø 4.0 X 3.2MM X 250 MM - NON-COUPLING
909.100	DFN DISTAL JIG
401.100	KUNTSCHER'S DIAMOND POINTED AWL - CURVED
903.120	WRENCH
903.145	TISSUE PROTECTOR
903.155	GUIDE WIRE HOLDER
909.110	PROTECTION SLEEVE Ø 10 X 08 MM
909.115	WIRE SLEEVE Ø 8 X 2.5 MM
909.120	TROCAR Ø 8.0 MM
909.125	NAIL CONNECTING BOLT FOR DFN
909.140	DRILL SLEEVE Ø 8 X 4.0 MM
903.124	SLOTTED HAMMER
903.120	SPANNER
421.045	DEPTH GAUGE 4.9MM
903.160	GUIDE ROD Ø 2.5MM X 95 CM
	6.0MM ALLEN KEY
903.123	INSERTION /EXTRACTOR

Specification

- Implants are available in TT & SS.
- Instruments are available in SS.

Indication for use

- The Distal Femoral Nail System is intended for stabilization of fractures in the distal femur. It is indicated for use in treating fractures such as distal femoral shaft fractures, supracondylar fractures, intercondylar fractures, and segmental fractures. The system provides internal fixation through intramedullary nailing, promoting alignment, stabilization, and early mobilization.

